

(19) World Intellectual Property  
Organization  
International Bureau



INTERNATIONAL BUREAU OF PATENT COOPERATION  
35, rue de la Harpe, CH-1015, Genève, Suisse  
P.O. Box 6859, CH-1211, Genève, Suisse  
P.O. Box 17, 1211, Genève, Suisse

(43) International Publication Date  
24 February 2005 (24.02.2005)


PCT

(10) International Publication Number  
**WO 2005/017947 A2**

- (51) International Patent Classification<sup>7</sup>: **H01J 61/32**,  
61/02, 61/92, H01K 9/08 [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (21) International Application Number: **PCT/IB2004/051387** (72) Inventors; and  
(75) Inventors/Applicants (for US only): **KÜPPER, Lukas** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). **SPINGER, Benno** [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE). **HENDRICKX, Josephus, Christiaan, Maria** [NL/DE]; c/o Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (22) International Filing Date: **4 August 2004 (04.08.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **03102556.2** **15 August 2003 (15.08.2003)** **EP** (74) Agent: **VOLMER, Georg**; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE). (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,**
- (71) Applicant (for all designated States except DE, US): **KONINKLIJKE PHILIPS ELECTRONICS N. V.**

[Continued on next page]

(54) Title: **LAMP FOR A MOTOR VEHICLE HEADLIGHT**

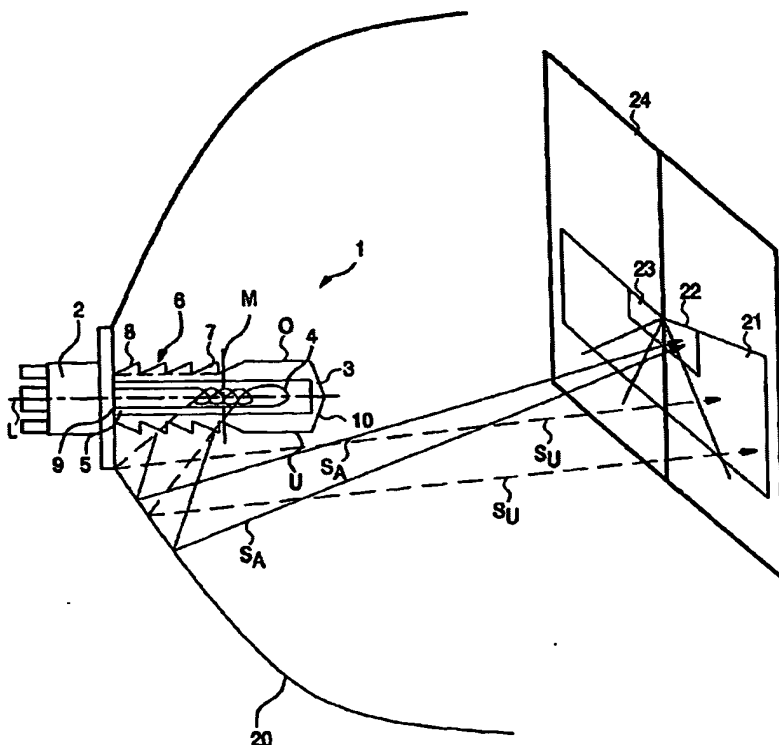

(57) **Abstract:** A lamp (1, 11, 14, 17) for a motor vehicle headlight is described. The lamp (1, 11, 14, 17) comprises a bulb (3) surrounding a light source (4) and a lamp base (2) arranged at an end of the bulb (3) and serving to support the lamp (1, 11, 14, 17) inside a reflector (20) of the headlight. At least one lens structure (7, 12, 15, 18) is present in or at an upper side (O) and/or lower side (U) of the bulb (3). This lens structure (6, 12, 15, 18) is constructed such that at least a portion of the light radiated by the light source (4) in the direction of a region of the reflector (20) close to the lamp base is redirected into a region of the reflector lying farther to the front.